


# DO20H Fuel and Oil Suction and Delivery Hose

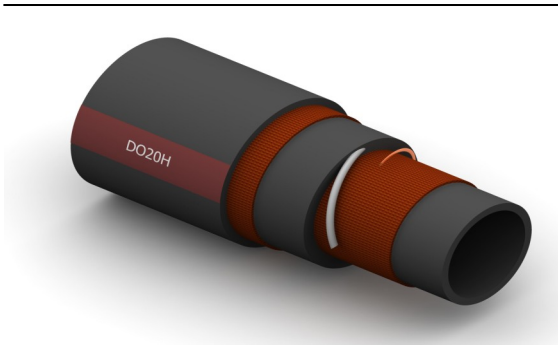

## Construction:

**Tube:** Black NBR.

**Reinforcement:** High Tensile Textile Cords with Embedded Steel Helix Wire And Antistatic Wire.

**Cover:** Black CR/BR Blend; Abrasion, Ozone and Hydrocarbon Resistant.

**Temperature Range:** -30°C To +100°C.

**Typical Application:** Fuel Oil Suction and Delivery, with up to 50% Aromatic Content, suitable for Sea-water, Mud and general offshore applications, long lasting in bunkering applications.

## Branding:

**Continental ContiTech DO20H OIL SUCTION & DELIVERY WP 20 BAR**

White text on a Brown stripe

## Technical Data:

Part No	Inside Dia		O.D. mm	Working Pressure		Minimum Burst Pressure		Min Bend Rad mm	Weight Kg/M
	mm	Inch		Bar	PSI	Bar	PSI		
DO20H-032	51	2	70	20	300	80	1200	305	2.75
DO20H-048	76	3	99	20	300	80	1200	380	4.50
DO20H-064	102	4	127	20	300	80	1200	510	6.63
DO20H-080	127	5	155	20	300	80	1200	635	8.60
DO20H-096	152	6	182	20	300	80	1200	760	11.34
DO20H-128	203	8	240	20	300	80	1200	1015	18.60
DO20H-160	254	10	293	20	300	80	1200	1270	26.10
DO20H-192	300	12	347	15	225	60	900	1700	38.00

Dunlop Oil & Marine Ltd  
Jubilee Industrial Estate  
Ashington, Northumberland  
NE63 8UB United Kingdom  
[www.dunlop-oil-marine.co.uk](http://www.dunlop-oil-marine.co.uk)

**Continental**   
**CONTITECH**

The content of this publication is not legally binding and is provided as information only. The trademarks displayed in this publication are the property of Continental AG and/or its affiliates. Copyright © 2011 ContiTech AG. All rights reserved.  
For complete information go to:  
[www.contitech.de/discl\\_en](http://www.contitech.de/discl_en)